



■ **Outer Dimension:**

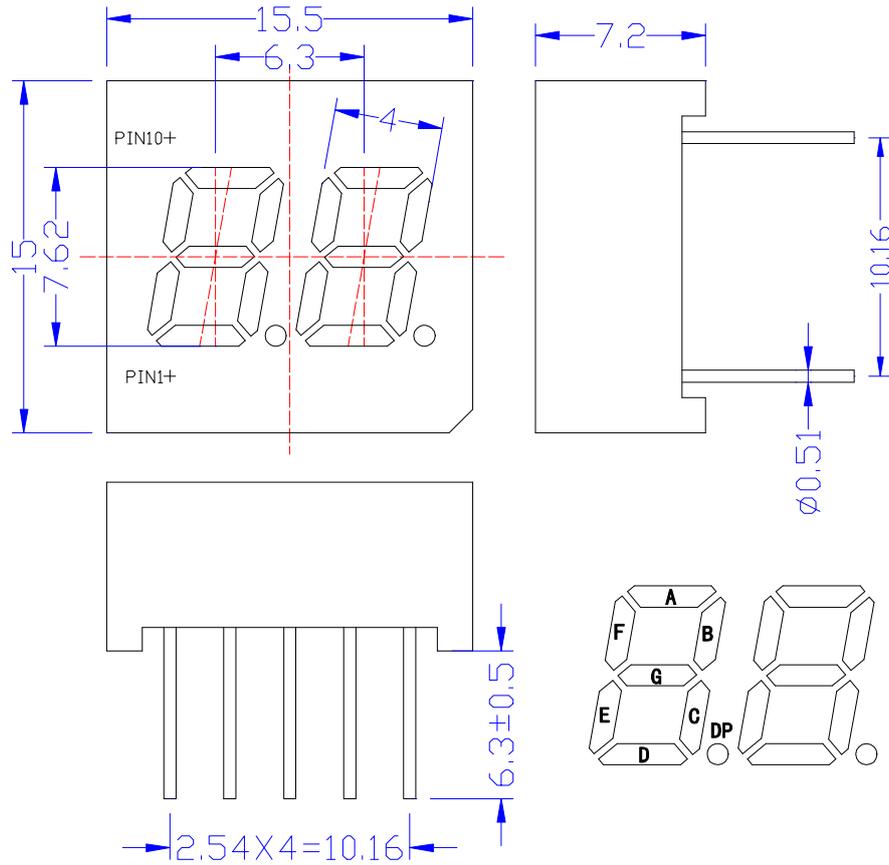

Notes: Unless otherwise stated, The tolerance is $\pm 0.25\text{mm}$.

■ **Circuit Diagram :**

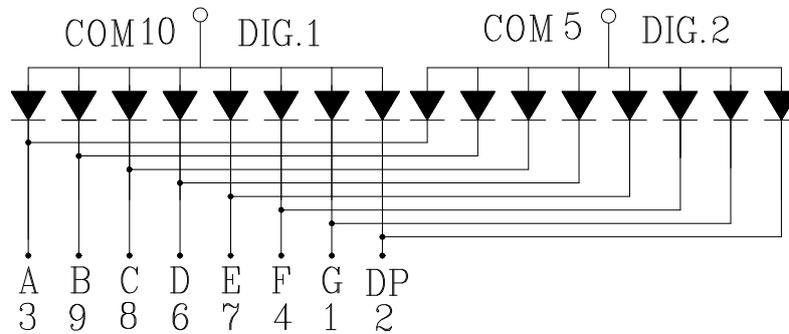

■ **Pin Connection:**

PIN NO.	CONNECTION	PIN NO.	CONNECTION
1	Cathode G	6	Cathode D
2	Cathode DP	7	Cathode E
3	Cathode A	8	Cathode C
4	Cathode F	9	Cathode B
5	Common Anode DIG2	10	Common Anode DIG1

■ **Features:**

- High Reliability
- Color :Red Digit
- Low Power Requirement

- Easy Assembly

■ Description:

- Double Digits Display
- Digit Height: 7.62 mm(0.30")
- Encapsulation With White Epoxy And Black surface

■ Absolute Maximum Rating (Ta=25°C):

Parameter	Symbol	Condition	Color	Rating	Units
Power Dissipation Segment	P_d	—	Red	60	mW
Forward Current Segment	I_F	—	Red	50	mA
Derating Of If Per Segment	ΔI_F	$T_a \geq 25^\circ C$	Red	0.30	mA/°C
Peak Forward Current Per Segment	I_{FP}	1/10 Duty 10KHz	Red	100	mA
Reverse Voltage Per Segment	V_R	—	Red	5	V
Operating Temperature Range	T_{opr}	—	—	-30~+80	°C
Storage Temperature Range	T_{stg}	—	—	-30~+80	°C

■ Electrical/Optical Characteristics Rating(Ta=25°C)

Item	Symbol	Test conditions	Location	Color	Rating			Units
					Min.	Typ.	Max.	
Forward Voltage	V_F	$I_F=20mA$	Per Segment	Red	—	2.1	2.5	V
Reverse Current	I_R	$V_R=5V$	Per Segment	Red	—	—	100	μA
Luminous Intensity	I_V	$I_F=10mA$	Per Segment	Red	—	3.5	—	mcd
Peak Emission Wave Length	λ_P	$I_F=20mA$	Per Segment	Red	—	640	—	nm
	λ_D					630		
Spectral Line Half Width	$\Delta \lambda$	$I_F=20mA$	Per Segment	Red	—	40	—	nm
Luminous Intensity Matching Ratio	I_{v-m}	$I=20mA$					2:1	

■ Pb, Cd, Hg, Cr+6, PBBs, PBDEs 6 Substances Complies To RoHS Standard.

■ Soldering Conditions: Soldering Temp. $\leq +260^\circ C$, Soldering Time. $\leq 3sec$.

(at 2mm Distance from The Case of Reflector Edge)