



■ **Outer Dimension:**

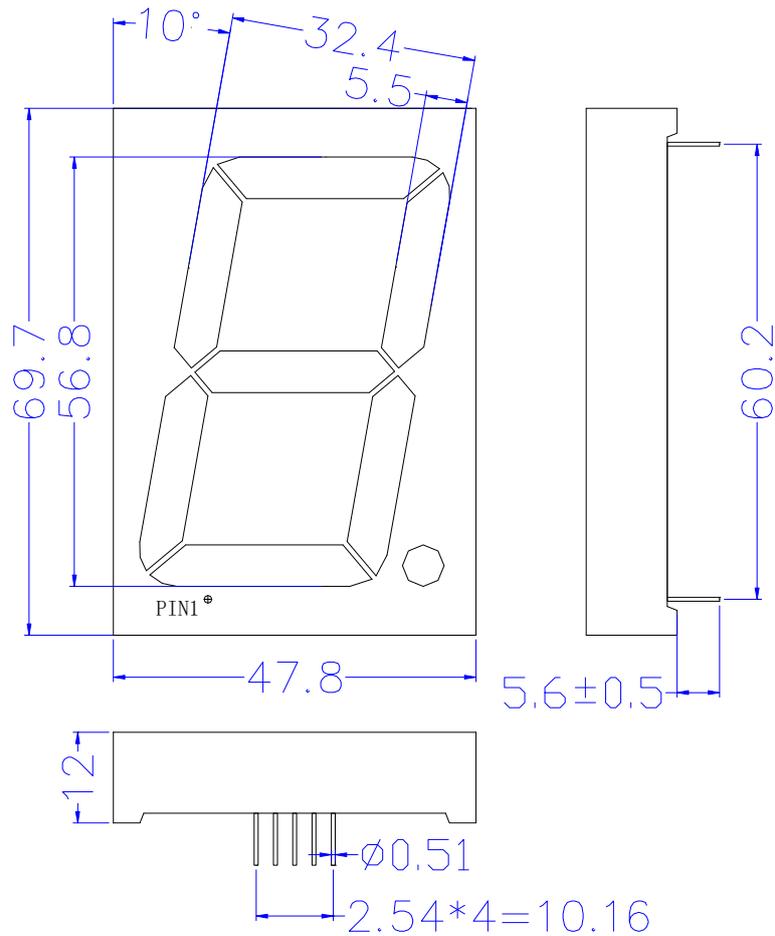

Notes: Unless otherwise stated, The tolerance is $\pm 0.25\text{mm}$.

■ **Circuit Diagram:**

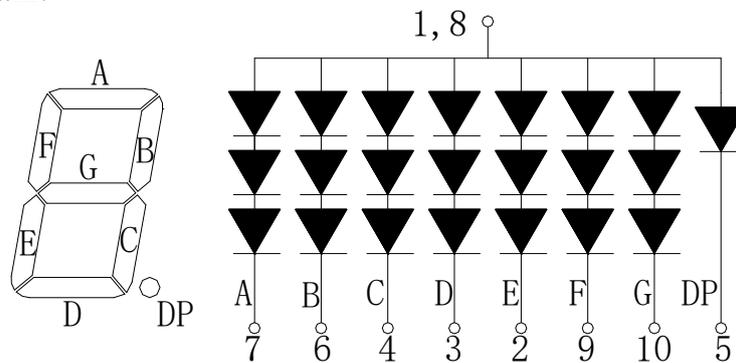

■ **Pin Connection:**

PIN NO.	CONNECTION	PIN NO.	CONNECTION
1	Common Anode	6	Cathode B
2	Cathode E	7	Cathode A
3	Cathode D	8	Common Anode
4	Cathode C	9	Cathode F
5	Cathode DP	10	Cathode G

■ **Features:**

- High Reliability
- Color: AlGaInP Yellow-Green Digit

. Low Power Requirement

. Easy Assembly

■Description:

. Single Digit Display

. Digit Height:56.8mm (2.3")

. Black Face and Encapsulation With White Epoxy

■Absolute Maximum Rating (Ta=25°C):

Parameter	Symbol	Condition	Color	Rating	Units
Power Dissipation Segment	P_d	—	Yellow-Green	65	mW
Forward Current Segment	I_F	—	Yellow-Green	20	mA
Derating Of If Per Segment	ΔI_F	$T_a \geq 50^\circ C$	Yellow-Green	0.30	mA/°C
Peak Forward Current Per Segment	I_{FP}	1/10 Duty 10KHz	Yellow-Green	100	mA
Reverse Voltage Per Segment	V_R	—	Yellow-Green	5	V
Operating Temperature Range	T_{opr}	—	—	-35~+85	°C
Storage Temperature Range	T_{stg}	—	—	-35~+85	°C

■Electrical/Optical Characteristics Rating(Ta=25°C)

Item	Symbol	Test conditions	Location	Color	Rating			Units
					Min.	Typ.	Max.	
Forward Voltage	V_F	$I_F=20mA$	Per Segment	Yellow-Green	5.1	6.3	7.5	V
		$I_F=20mA$	DP	Yellow-Green	1.7	2.1	2.5	V
Reverse Current	I_R	$V_R=5V$	Per Segment	Yellow-Green	—	—	100	μA
Luminous Intensity	I_V	$I_F=10mA$	Per Segment	Yellow-Green	—	15	—	md
Peak Emission Wave Length	λ_D	$I_F=20mA$	Per Segment	Yellow-Green	567	571	576	nm
Spectral Line Half Width	$\Delta \lambda$	$I_F=20mA$	Per Segment	Yellow-Green	—	20	—	nm
Luminous Intensity Matching Ratio	I_{V-m}	$I_F=20mA$					2:1	

■Pb, Cd, Hg, Cr+6, PBBs, PBDEs 6 Substances Complies To RoHS Standard.

■Soldering Conditions: Soldering Temp. $\leq +260^\circ C$, Soldering Time. $\leq 3sec$.

(at 2mm Distance from The Case of Reflector Edge)